

عرضه کننده به روز ترین ماشینهای چاپ دیجیتال در ایران

ماشینهای پروداکشن نسل جدید کونیکا مینولتا

با طیف گسترده از مواد مصرفی و قطعات یدکی

گارانتی و خدمات پس از فروش مطابق استاندارد کمپانی سازنده

با پشتیبانی مالی و فنی از ایده آل آلمان

ACCURIOPRINT C4065 SPECIFICATIONS

RETHINK OPTIONS

AccurioPrint C4065

Type	Console
Color availability	Color
Scanning resolution	600 dpi x 600 dpi
Writing resolution	Equivalent to 3600 dpi x 2400 dpi
Print/Copy Speed	A4 Simplex: 66 ppm
	A3 Simplex: 37 ppm
	217-360 g/m2 45 A4/26 A3
Gradation	256
Paper Sizes	330.2 x 487.7 mm 330.2 x 860 mm (max.duplex) 330.2 x 1300 mm (max. simplex)
Standard Paper Tray Capacity	1500 sheets A4 80 gsm
Magnification	25 – 400%, in 0.1% steps
System memory	8 GB
Warm-up Time	390 seconds or less
First copy out time (Color/Monochrome)	6.5 seconds or less(A4) colour
	4.0 seconds or less (A4) B&W
Scan speed (A4)	Single-sided 140 opm*3 Duplex 280 opm*1
Envelope Printing	Standard
Main Unit Size (WxDxH) mm	84.65 x 35.55 x 58.19 inches (2,150 x 903 x 1478 mm) (main unit + DF-713 + LU-202m + FS-532+IC-607)
Power consumption	3840 W or less(Main body)
Duty Cycle	7,02,000 ²

* DF-713 – DUAL SCAN DOCUMENT FEEDER (OPTION)

Tray Capacity	300 sheets (80 gsm)
Original Weight Duplex	50 – 210 gsm
Detectable Document Size	Min: 100 x 140 mm Max: 297 x 432 mm
Scan Speed by Resolution	200 dpi Colour: Simplex 140 ipm Monochrome: Simplex 140 ipm Duplex 280 ipm
Scan Speed by Resolution	300 dpi Colour: Simplex 120 ipm Monochrome: Simplex 120 ipm Duplex 240 ipm
Scan Speed by Resolution	400 dpi Colour: Simplex 100 ipm Monochrome: Simplex 100 ipm Duplex 200 ipm
Copy Speed	600 dpi Colour: Simplex 75 ipm Monochrome: Simplex 80 ipm Duplex 150 ipm

OPTIONS

* KM Image Controller	IC-607
EFI internal Controller	IC-419
Paper Feeding Unit	PF-602m
Paper feeding unit	PF-707m
PFU connection Kit	FA-502
Dehumidifier heater	HT-503
Fusing unit for envelope printing	HT-511
Large capacity feeding unit	LU-202m
Envelope printing guide for LU	MK-746
* Large capacity feeding unit (banner)	LU-202XLm
Multi bypass feeding	MB-508
Banner Paper Feeder kit	MK-760
* Multi bypass tray	MB-509
Intelligent Media Sensor	IM-101
* Output Tray	OT-511
Stapling Unit	FS-532m
Saddle Stitcher Kit	SD-510
Punch Kit	PK-525
Post Inserter Kit	PI-502
Output Tray Unit	OT-512
Long Sheet Kit (Output)	MK-761

* KONICA MINOLTA IMAGE CONTROLLER IC-607

Architecture	Internal
OS	Linux
CPU	Intel Pentium C4400
Clock speed	3.2 GHz
* RAM std	16 GB
* HDD	2 TB (2 x 1TB)
Page-description language	Adobe® PostScript® 3; PDF v1.7; TIFF (v6); PPML v2.2
Applicable OS	Windows 8.1/10; Windows Server 2012/R2/2016/2019; Mac OS X 10.11~10.15

IMAGE CONTROLLER IC-419

Architecture	Internal
OS	Linux
CPU	Intel® Pentium® Processor G4400
Clock speed	3.2 GHz
RAM std	8 GB
HDD	500 GB
Page-description language	Adobe® PostScript® Levels 1, 2, 3, APPE 5, Microsoft Office document formats
Applicable OS	Windows 8.1/10; Windows Server 2012/R2/2016/2019; Mac OS X 10.11-14

–All specifications refer to A4-size paper of 80 gsm quality.

–The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.

–Some of the product illustrations contain optional accessories.

–Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.


–Konica Minolta does not warrant that any prices or specifications mentioned will be error-free.

–All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

–*When using KM when using IC-607

–*Peak volume in Q Zone

–*When using DF-713, 200 dpi

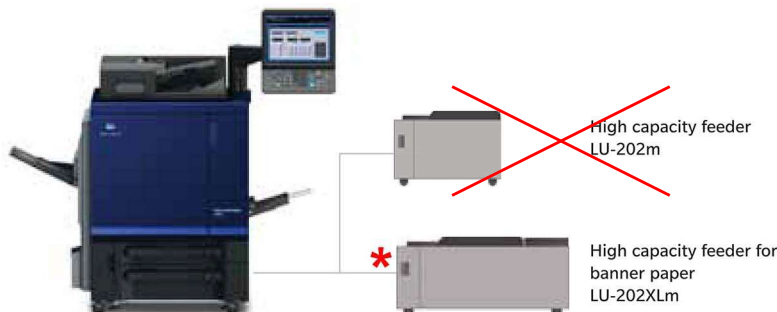

KONICA MINOLTA